

HYDRANT DESIGNATION

This designation belongs to the fire designations group. It is put upon the hydrant door.

It is a frequent occurrence that hydrants in newer built buildings are situated under the wood paneling, or behind the mirrors, or are built into the walls and covered by the wallpaper.

In all these cases an adequate designation of quality, which would meet the law provisions is unavoidable, and at the same time it does not "endanger" the surrounding interior. Considering that the color and the symbol and even the size are determined by the law - giver, we did our best to reach this effect.

dimension: Standard dimension is 150 x 140 mm.


color: The background is red with the white symbol.

material: The material the pictograms are made of is GRAVOPLY material of the thickness of 0.8 mm, the product of the American producer NEW HERMES.

production technique: By engraving by the programmed CNC machine the upper layer of the two - layer GRAVOPLY material is removed, and under it there emerges the lower layer of different color. By the same machine the shape of the given radius is cut through.

installation: The pictogram is attached by double self - sticking tape 3M 468MP which provides a solid connection to the background.

technical description: HYDRANT DESIGNATION

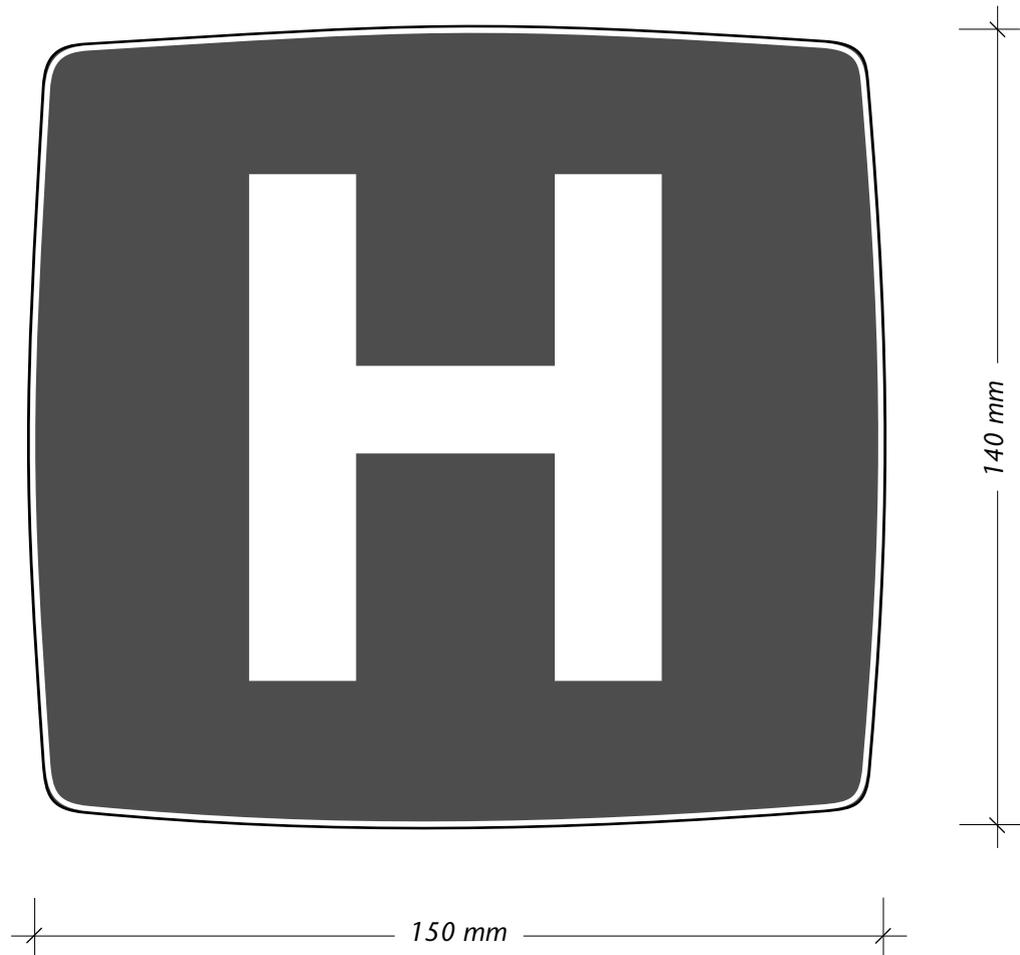

P 1:1,5

technical drawing: HYDRANG DESIGNATION